


# Tadpole® Talin® Notebooks with Java™ Desktop

## Linux Workstation performance in a reliable, affordable notebook.

From the World's leading UNIX® notebook vendor, Talin notebooks from Tadpole are the first fully supported Linux notebooks from an established notebook manufacturer. Talin notebooks offer a real alternative for notebook productivity, they deliver portable workstation performance for your Linux applications with all the features needed for personal productivity. They are ideal for use by s/w developers, engineers, and system administrators and make a true productivity alternative to traditional solutions.

- S.U.S.E. Linux
- Java Desktop Productivity Software with GNOME desktop,
- StarOffice™ 7.0, Evolution e-mail client and Mozilla™ 1.4 web browser.
- 2.4GHz or 3.0GHz Pentium P4 Processors
- Up to 80GB internal disk storage
- 802.11b wireless networking
- Up to 1GB DRAM

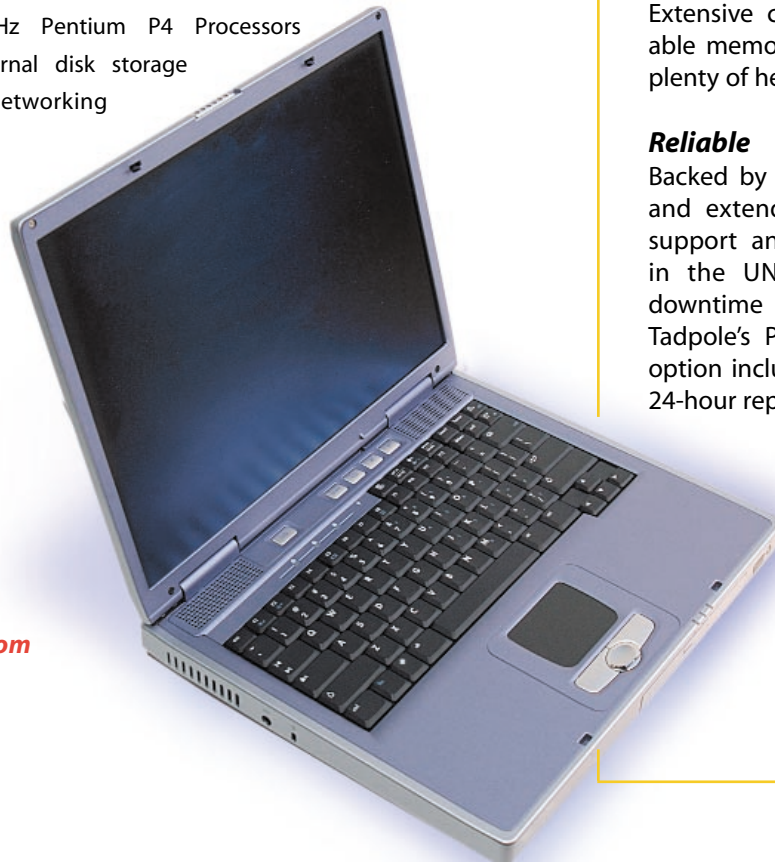

**Talin notebooks  
come pre-installed  
with Java Desktop from  
Sun Microsystems**

### StarOffice™

#### **Fully Supported Linux Distribution**

From the only company in the world with over 10 years experience manufacturing UNIX notebooks.

#### **Affordable**

The first fully supported Linux notebooks with competitive notebook pricing.

#### **Expandable & Upgradeable**

Extensive connectivity, easily upgradeable memory and disk options provide plenty of headroom for future upgrades.


#### **Reliable**

Backed by Tadpole's standard warranty and extended warranties, world class support and 21 year solid reputation in the UNIX market. For minimized downtime and maximum productivity Tadpole's Platinum extended warranty option includes accidental damage and 24-hour repair or replacement.

# Talin Notebook Specifications



<b>PROCESSOR</b>	CPU options Chip Sets	2.4GHz or 3.0GHz Intel® D/T P4, 400/533MHz FSB Intel 845PE and ICH4
<b>MEMORY</b>	Capacity/Configuration	128MB - 1GB SDRAM. Two DDR SODIMM sockets
<b>DISPLAY</b>	Resolution	15" SXGA+ (1400 x 1050) color display
<b>STANDARD INTERFACES</b>	Networking USB 2.0 Parallel Audio  Video Firewire iRDA	Integrated 10/100baseT Ethernet port via RJ-45 socket Three USB Type-1 connectors IEEE 1284/Centronics compatible port via industry standard DB25 connector 16-bit audio, 48KHz sampling rate stereo Mono mic-in. Stereo line-in/mic, line-out/headphone-out on 2 x 2.5mm jack sockets Internal stereo speakers DB-15 VGA connector One IEEE1394 Firewire port Integrated iRDA port
<b>GRAPHICS</b>		ATI M7P Graphics Acceleration with 32MB VRAM
<b>MASS STORAGE &amp; MEDIA</b>	Disk Storage  Disk Capacity Options  DVD/CD-ROM options	One internal high performance IDE disk drive  20GB (ATA-5) 13ms Avg Seek Time 40GB (ATA-5) 13ms Avg Seek Time 60GB (ATA-5) 13ms Avg Seek Time 80GB (ATA-5) 13ms Avg Seek Time Integrated 24x CD-ROM Integrated CD-RW/DVD (24x Read, 8x Write CD-RW; 8x DVD)
<b>WIRELESS</b>		Integrated 802.11b wireless networking
<b>PCMCIA/CARDBUS</b>		One Type II PCCard/PCMCIA slot
<b>KEYBOARD/MOUSE</b>		87 Keys, 3.0mm stroke with 101/102 Key Emulation Touch pad with 4-way scroll buttons
<b>BATTERY</b>		9 cell Li-ion battery pack with 73.2Wh capacity. Approximately 1.5hrs battery life, depending on usage
<b>AC POWER ADAPTER</b>		Compact AC-DC autosensing power adapter, 90-264v ac, 47-63Hz
<b>SOFTWARE</b>	Operating System Options Productivity	S.U.S.E. Linux Desktop 1.0 Variant Java Desktop including GNOME 2.2, StarOffice 7.0, Ximian Evolution 1.4, Mozilla 1.4
<b>SIZE/WEIGHT</b>		Approximately: 12.8" wide x 10.5" deep x 1.5" thick. 7.1lbs with battery
<b>ENVIRONMENTAL</b>	Temperature  Humidity  Altitude	Operating: 41°F - 104°F (5 - 40°C) Non Operating: -4° F - 140° F (-20 - 60°C) Operating: 20-80% RH, non-condensing: 27C max wet bulb Non-Operating: 93% RH, non-condensing: 35C max wet bulb 0-40,000ft (0-12,000m)
<b>SECURITY</b>		Kensington Lock attachment
<b>REGULATORY COMPLIANCE</b>		EMC: - FCC Class B - CE (EN55022 Class "B", EN50081-1, EN50082-1, IEC 801-2, IEC 801-3, IEC 801-4) - NOM Safety: - UL 1950 - CSA C22.2 No. 950

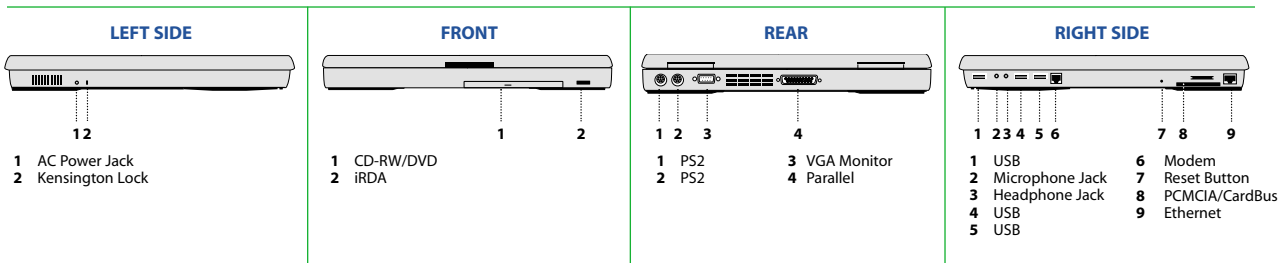

© 2003 Tadpole Computer, Inc. SPARC and SPARCLE® are registered trademark of SPARC International, Inc. in the United States and countries worldwide. Products bearing the SPARC trademarks are based on an architecture developed by Sun Microsystems, Inc. Sun®, Sun Microsystems®, the Sun logo, the Sun iForce Partner logo and Solaris™ are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries. All other trademarks recognized. Specifications are subject to change without notice.

Tadpole Computer, Inc.  
20245 Stevens Creek Blvd., Cupertino, CA 95014  
Sales Tel: 1-800-734-5483 +1 760-929-0992  
Fax: +1 760-931-1063  
e-mail: [sales@tadpole.com](mailto:sales@tadpole.com)  
<http://tadpolecomputer.com>

